


# 9 WAY PLUG

1985, 1986, 1987, 1988

## WIRING COLOR CODE

Circuit #1	White	Ground
Circuit #2	Blue	Brake
Circuit #3	Green	Running Lights
Circuit #4	Black	Charge Line (+)
Circuit #5	Red	Stop & Left Turn
Circuit #6	Brown	Stop & Right Turn
Circuit #7	Yellow	Back-up Light
Circuit #8	Gray	Refrigerator Switch
Circuit #9	Orange	Tire-Tele

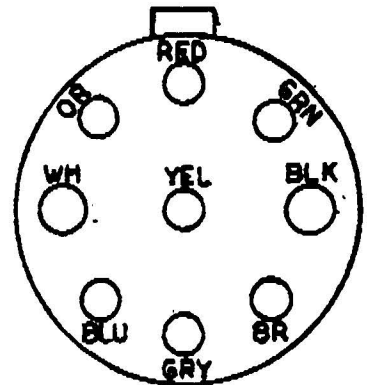

NOTE: The 9 way wire is spliced to the main harness in the area of the 12 volt distribution panel in front of the trailer.

Three of these wires are not spliced onto wires of the same color. They are as follows:

	<u>Color in Cable</u>	<u>Harness</u>
Back Up	Yellow	Black
Tire-Tele	Orange	Purple
Refrigerator Switch	Gray	Red